


# GS系列不锈钢同轴离心泵

GS SERIES STAINLESS STEEL COAXIAL CENTRIFUGAL PUMP

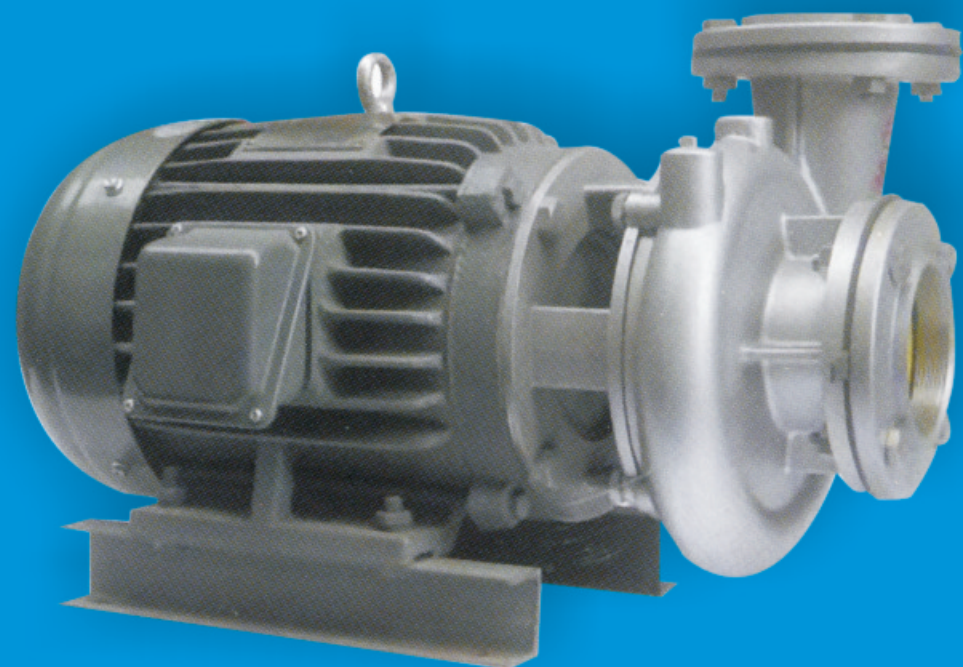

特殊设计之叶轮，效率高、寿命长、声音小、机体小、且吸水扬水性能特佳，采用不锈钢轴，经久耐用，马力1/2HP~40HP。

泵体及轴封材质，需依化学药液性质加以选择，以免损坏泵。适用于纯水业，化工行业，表面处理业等各行业

The special design of the impeller, high efficiency, long life, low noise and small body, and the pumping performance characteristics, adopt the stainless steel shaft, durable, power 1/2HP~40HP.

The pump body and shaft seal material, must according the chemical physic liquid to choose, so as not to damage the pump.

Suitable for water industry, chemical industry, surface treatment industry and other industries.

## 型号识别 Model identification

GS - 40 1 C 4 N H 50

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①系列代码 Series Symbol	GS SERIES
②出入口径-内牙式 In-outlet	25:1" 40:1-1/2" 50:2" 65:2-1/2" 75:3" 100:4"
③马力 Motor Power	1/2:1/2HP 1:1HP 2:2HP 3:3HP 5:5HP 7.5:7.5HP 10:10HP 15:15HP 20:20HP 25:25HP 30:30HP 40:40HP
④轴封材质 Shaft Seal Material	C-陶磁 Ceramics S-SIC

⑤泵体材质 Casing Material	4:SUS304 6:SUS316
⑥O环材质 O-Ring Material	N-NBR V-VITON
⑦特殊规格 Special Specifications	H-高扬程High-lift
⑧频率 Frequency	5:50Hz 6:60Hz

## 规格表 Specifications

型号 Model	马力 Power (HP)	进出口径 In-outlet (inch)	流量Flow(L/min)												
			10M	15M	20M	25M	30M	35M	40M	45M	50M	55M			
GS-25-12	1/2	1"×1"	110	40											
GS-40-1	1	1-1/2"×1-1/2"	210	160											
GS-40-1-H	1	1-1/2"×1-1/2"		140	90										
GS-40-2	2	1-1/2"×1-1/2"	280	250	190		170								
GS-50-2	2	2"×2"	360	280	210										
GS-50-3	3	2"×2"	450	400	320	210									
GS-50-3-H	3	2"×2"	360	350	300		240	200							
GS-65-3	3	2-1/2"×2-1/2"	700	500	330										
GS-50-5	5	2"×2"		500	480		400	370	250						
GS-65-5	5	2-1/2"×2-1/2"	870	800	700		550								
GS-75-5	5	3"×3"	1100	910	750		600								
GS-50-7.5	7.5	2"×2"	350	305	280		240	230	215	205	190	180			
GS-75-7.5	7.5	3"×3"	1000	950	820		750	620	450						
GS-75-10	10	3"×3"	975	910	800		700	650	600	550	420				
GS-100-10	10	4"×4"	1360	1315	1140		975	765							